



MICHELIN® SPRAYBIB™



ULTRAFLEX Technologies

- High load-carrying capacity at a lower inflation pressure creates less rutting and compaction.
- Optimized footprint offers outstanding traction and cleaning.
- Very High Flexion (VF) absorbs impact for a smoother ride and increased machine protection.
- 40 mph service under all conditions means no compromise on speed.
- Flexible casing delivers excellent handling and machine control.

POWERED BY MICHELIN® ULTRAFLEX™ TECHNOLOGIES FOR PERFORMANCE THAT LASTS

MICHELIN® SprayBib™ is the most advanced high clearance sprayer tire on the market today. Thanks in part to MICHELIN Ultraflex™ Technologies, the MICHELIN SprayBib provides the perfect combination of productivity, durability and simplicity.

IMPROVED PRODUCTIVITY


New stubble-resistant lug design offers better mobility with an exceptionally large footprint. So you can count on excellent traction, reduced soil compaction and improved stability, regardless of weather or soil conditions.

PERFORMANCE ADVANTAGE

The advanced MICHELIN SprayBib design allows the tire to support 14,330 lbs. at up to 40 mph while still requiring only 64 psi. The MICHELIN SprayBib also can be mounted on any standard rim, saving you money on costly reinforced rims. Plus, with no roading limitations on the warranty, you can drive confidently into any conditions.

LOAD/PSI COMPARISON*

The new MICHELIN SprayBib, featuring MICHELIN Ultraflex Technologies, outperforms the closest competition.

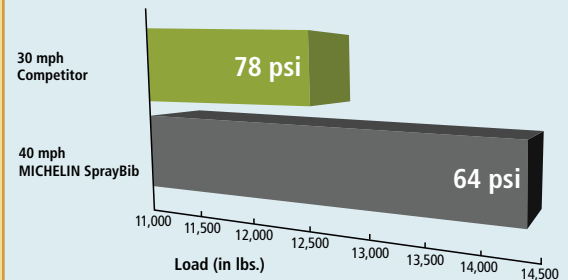

EXTENDED DURABILITY

Reinforced sidewalls and bead zones offer increased casing endurance and tread life so your investment can pay off for seasons to come.

TIRE LIFE COMPARISON

MICHELIN SprayBib tires have an expected life span of 3 to 5 years* as compared to 1 to 1.5 seasons for our main radial competitors.



*Source: Michelin Test and Research Centre (Almeria – Spain)



SPRAYER TIRES





MICHELIN[®] SPRAYBIB[™]



MICHELIN SPRAYBIB SPECIFICATIONS

Size	I.S.O. Index	Product Code	Conversion from Standard	Max. Inflation Pressure (psi)	Section Width (in.)	Overall Diameter (in.)	Rolling Circumference (in.)	Tread Depth (32nds)	RCI
VF 380/90R46	173D	27358	14.9R46	64	15.1	72.5	216.7	48	46

NOTE: The above tire is tubeless, but can be mounted with a tube.

NOTE: Product measurements are subject to change and are listed here for your convenience. Please see your representative for up-to-date data.

NOTE: Max. load and max. inflation pressure are @ 40 mph.



SATISFACTION GUARANTEED

MICHELIN stands behind all our AG radials. See your MICHELIN dealer for complete warranty details.

For more information, visit us at www.michelinag.com

CANADA

Michelin North America (Canada), Inc.
For More Information, Call:
1-877-838-8473 (English)
1-888-707-7638 (French)

UNITED STATES

Michelin North America, Inc.
For More Information, Call: 1-888-552-1213

MEXICO

Michelin Mexico Services
For More Information, Call: 525 55 488-6400

Michelin is an equal opportunity employer.
O&B 40157 (11/2010) MUT43839
©2010 MNA, Inc. All Rights Reserved.

