

MICHELIN® XDN®2

11R22.5
275/80R22.5
315/80R22.5
11R24.5
275/80R24.5



All weather premium drive tire optimized
for exceptional traction and mileage.

Exceptional mileage

Long tread life

- Next-generation application specific compounds
- Unique tread design
- Wide open shoulder grooves

Tread life and traction


Exceptional handling

Excellent traction and stability

- Wide open shoulder grooves
Traction and tread life
- Matrix™ siping technology
Traction and stability
- Extra-wide tread


Matrix™ Siping

Matrix™ sipes provide inter-locking action which offers excellent traction and even wear.

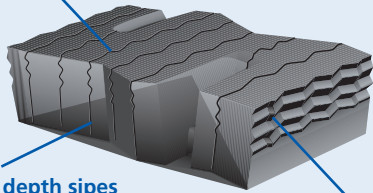

Full depth sipes help provide excellent traction throughout the life of the tread.

Zig-Zag groove walls help provide optimized biting edges and excellent water and snow evacuation.

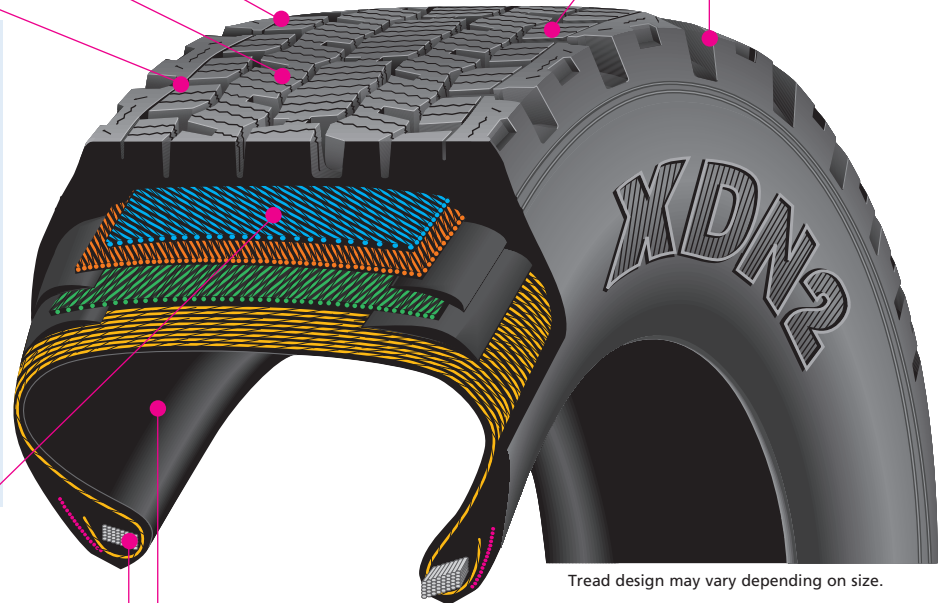

Tread design may vary depending on size.

Extended casing life

Longer life and retreadability

- Full-width elastic protector ply
- Rectangular bead bundle
 - Reduces heat and fatigue
 - Michelin exclusive
- Enhanced inner liner
- Robust bead area

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed* km/h	Loaded Radius		Overall Diameter		Overall Width ‡		Approved Wheels ◊	Min. Dual Spacing ‡		Revs per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		lb.	psi	kg	kPa	lb.	psi	kg	kPa
11R22.5 ¹	G	72805	27	120	19.5	495	41.7	1,060	11.2	284	8.25, 7.50	12.5	318	496	6,175	105	2,800	720	5,840	105	2,650	720
11R22.5 ¹	H	64321	27	120	19.5	495	41.7	1,060	11.2	284	8.25, 7.50	12.5	318	496	6,610	120	3,000	830	6,005	120	2,725	830
275/80R22.5 ¹	G	63465	27	120	18.9	481	40.6	1,030	11.0	279	8.25, 7.50	12.2	311	511	6,175	110	2,800	760	5,675	110	2,575	760
315/80R22.5 ²	L	04355	28	120	20.0	507	43.1	1,094	12.5	317	9.00	13.8	351	486	9,090	130	4,125	900	8,270	130	3,750	900
11R24.5 ¹	H	87129	27	120	20.5	522	43.8	1,112	11.2	284	8.25, 7.50	12.5	318	473	7,160	120	3,250	830	6,610	120	3,000	830
275/80R24.5 ¹	G	75684	27	120	19.6	497	41.8	1,061	10.6	270	8.25, 7.50	12.2	311	495	6,175	110	2,800	760	5,675	110	2,575	760

¹ MICHELIN® XDN®2 tread design (non-directional).

² MICHELIN® XDN®2 Grip tread design (directional).

* Exceeding the lawful speed limit is neither recommended nor endorsed.

‡ Overall width will change 0.1 in. (2.5 mm) for each 1/4-in. change in wheel width. Minimum dual spacing should be adjusted accordingly.

◊ Note: Wheel listed first is the measuring wheel.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America (Canada) Inc. reserves the right to change product specifications at any time without notice or obligation. Please consult the rim manufacturer's load and inflation limits. Never exceed the rim manufacturer's limits without the permission of the component manufacturer.