

MICHELIN® XTA2+ ENERGY WIDE BASE TIRE



The fuel efficient⁽¹⁾, high mileage trailer tire
designed specifically for high cube service
in line haul applications.

(1) Based on industry standard rolling resistance testing of comparable tires or retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.



MICHELIN® XTA® 2+ ENERGY WIDE BASE TIRE



LINE HAUL APPLICATIONS

The fuel efficient⁽¹⁾, high mileage trailer tire designed specifically for high cube service in line haul applications.

Exceptional Fuel Efficiency⁽¹⁾

No compromise fuel economy

- **Advanced Technology™ Compounds**
- **Tread design**
Optimized for free rolling conditions

Extended Mileage (15%)


15% Longer tread life⁽²⁾

- **Wide footprint and solid shoulder**

Maximum Retreadability

Improved protection and casing fatigue resistance

- **Full width elastic protector ply**

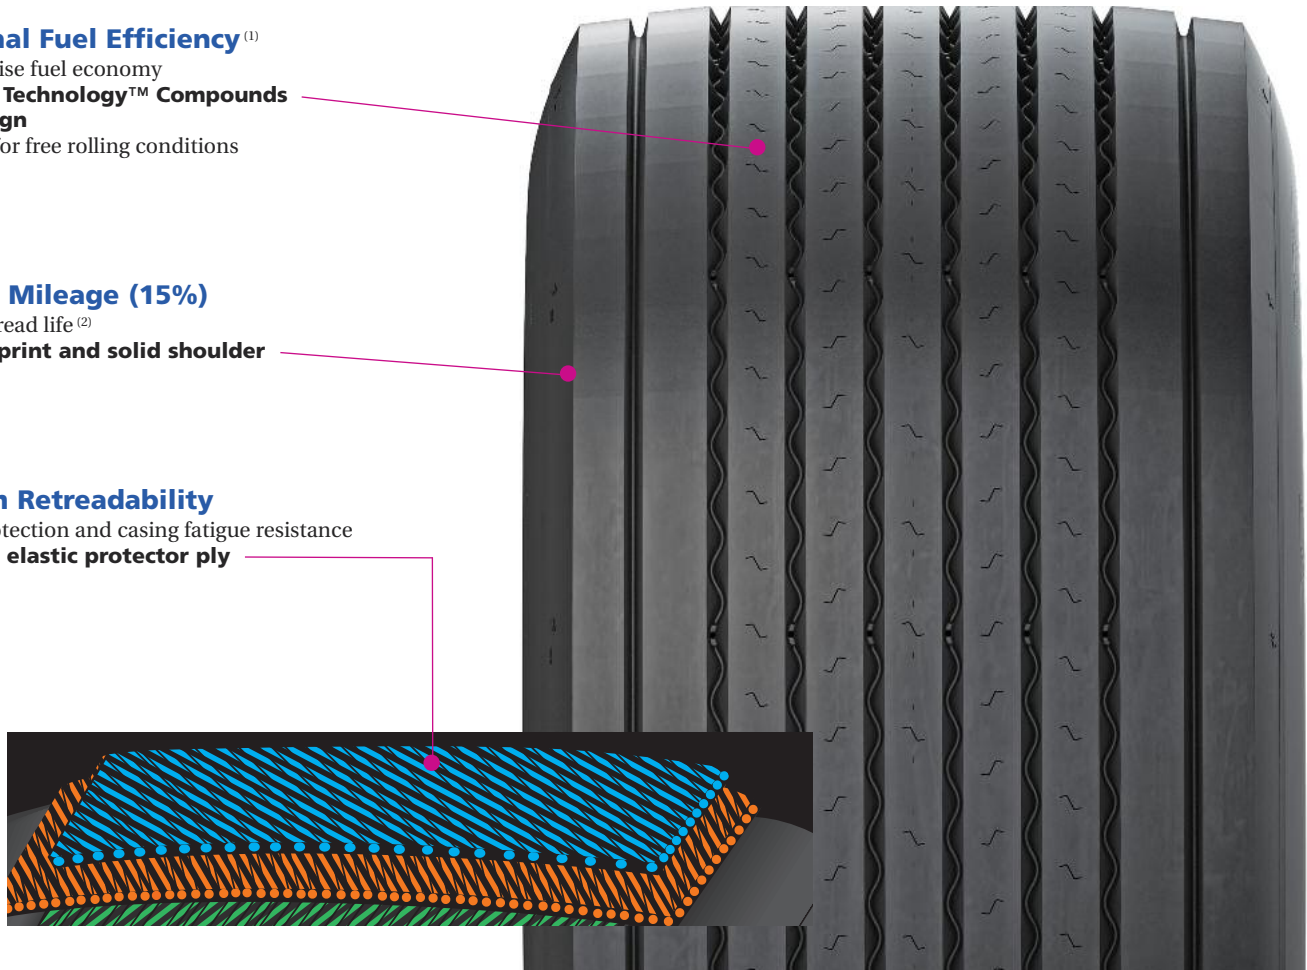

| Size | Load Range | Catalog Number | Tread Depth | Max. Speed (*) | Loaded Radius | | Overall Diameter | | Overall Width (‡) | | Approved Wheel | Revs Per Mile | Max. Load and Pressure Single | | | |
|-------------|------------|----------------|-------------|----------------|---------------|-----|------------------|-----|-------------------|-----|----------------|---------------|-------------------------------|-----|------|-----|
| | | | 32nds | mph | in. | mm | in. | mm | in. | mm | | | lbs. | psi | kg. | kPa |
| 445/45R19.5 | M | 21329 | 16 | 62 | 16.3 | 414 | 35.6 | 903 | 17.2 | 436 | 14.00 | 587 | 9920 | 130 | 4500 | 900 |

(1) Based on industry standard rolling resistance testing of comparable tires or retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

(2) When compared to MICHELIN® XTA®2 ENERGY Wide Base tires.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

www.michelintruck.com

United States

Michelin North America, Inc.
One Parkway South
Greenville, SC 29615
1-888-622-2306

Canada

Michelin North America (Canada), Inc.
2500 Daniel Johnson, Suite 500
Laval, Quebec H7T 2P6
1-888-871-4444

Mexico

Industrias Michelin, S.A. de C.V.
Av. 5 de febrero No. 2113-A
Fracc. Industrial Benito Juarez
7 6120, Querétaro, Qro. Mexico
011 52 442 296 1600