



REGIONAL APPLICATIONS

THE MICHELIN® XZE®2+ TIRE

All-position radial optimized for steer axles in regional and line haul applications.


Line Haul	Regional	Urban	On/Off Road
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recommended Acceptable



THE MICHELIN® XZE® 2+ TIRE

All-position radial optimized for steer axles in regional and line haul applications.

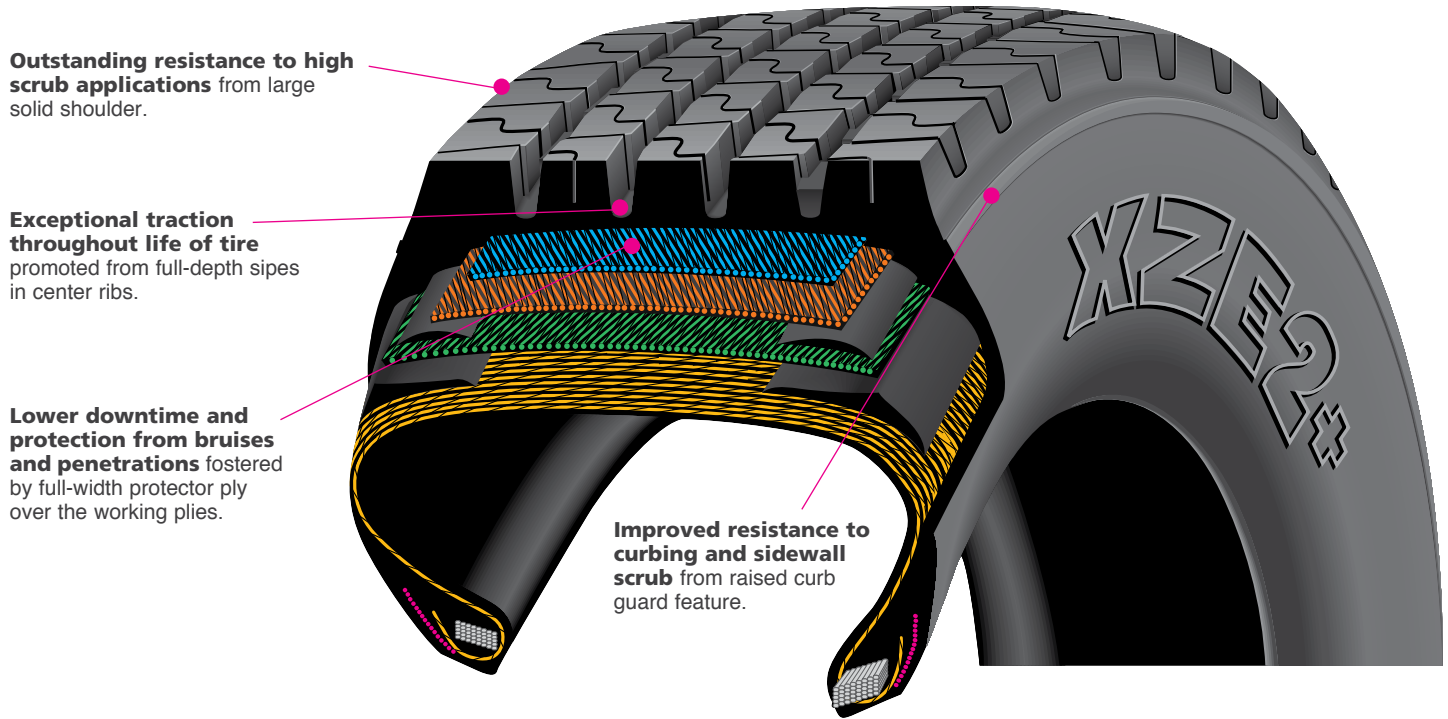

European design

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
285/70R19.5	H	68419	18	75	16.2	412	35.2	895	11.1	283	7.50, 8.25, 9.00	12.2	311	592	6395	120	2900	830	6005	120	2725	830
275/70R22.5	J	78395	19	75	17.6	448	38.0	966	10.9	276	7.50, 8.25	11.9	303	545	6940	130	3150	900	6395	120	2900	830

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

 TO FIND OUT MORE
michelintruck.com

 FIND US ON FACEBOOK
michelintruck.com

 CONTACT US BY EMAIL
michelintruck.com/contact-us/

 CONTACT US BY TELEPHONE
1-888-622-2306