# MICHELIN<sup>®</sup> XDA<sup>®</sup>5 TIRE

SHELIN

Longest wearing long haul drive tire featuring regenerating tread features that deliver excellent traction late in life.



# MICHELIN<sup>®</sup> XDA<sup>®</sup>5 TIRE



LINE HAUL & REGIONAL APPLICAT

Solid shoulder - designed to promote long, smooth

wear while providing excellent traction.

## Longest wearing long haul drive tire featuring regenerating tread features that deliver excellent traction late in life.

Wide footprint with square shoulders helps improve stability and increase mileage.

Michelin's Matrix<sup>™</sup> Siping technology helps provide exceptional traction on dry and slippery surfaces. The 3D Matrix sipes lock together for the stability normally associated with solid tread blocks.


**Regenerating tread features** a Michelin Durable Technologies feature - helps provide excellent traction throughout the life of the tire.

Deep 30/32nds tread designed to deliver long treadwear in high-torque, high horsepower tractor applications.

Full-width, elastic protector ply - helps protect the working plies from bruising and penetrations.

#### Rectangular bead bundle -

a Michelin® exclusive - simulates a solid steel rod "strapping" the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

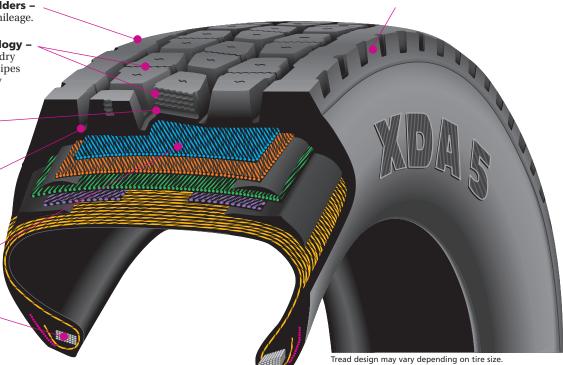

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single			Max. Load and Pressure Dual				
			32nds	mph	in.	mm	in.	mm	in.	mm	listed first.)	in	in mm	wille	lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
305/75R24.5	J	30987	30	75	20.1	510	43.3	1100	11.5	293	8.25, 9.00	13.5	343	480	8270	120	3750	830	7160	120	3250	830

Note: Wheel listed first is the measuring wheel.

\* Exceeding the lawful speed limit is neither recommended nor endorsed.

\* Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

### www.michelintruck.com

**United States** 

Michelin North America, Inc. One Parkway South Greenville, SC 29615 1-8888-622-2306

#### Canada

Michelin North America (Canada), Inc. 2500 Daniel Johnson, Suite 500 Laval, Quebec H7T 2P6 1-888-871-4444

#### Mexico

Industrias Michelin, S.A. de C.V. Av. 5 de febrero No. 2113-A Fracc. Industrial Benito Juarez 7 6120, Querétaro, Qro. Mexico 011 52 442 296 1600